


# MC 4EN

## EN54-24 CERTIFIED CEILING LOUDSPEAKER

MC 4EN is a ceiling-mounted loudspeaker specifically designed for voice evacuation and voice alarm systems. It delivers clear and intelligible speech announcements with a high sound pressure level and optimized mid-frequency response, ensuring dependable performance during emergency situations. The unit features quick-fit clamps for fast and secure installation into false ceilings. Fully compliant with the EN54-24 standard for voice alarm systems.

AMC 2017 - 03  
Revision 2019-03-20  
EN54-24:2008  
1438-CPR-0412  
ISSUE DATE: 17  
TYPE A  
DOP No.: AMC-1611

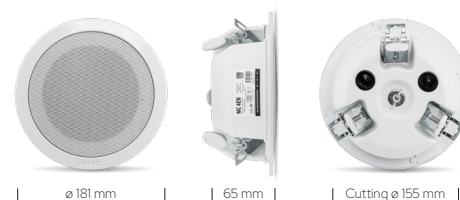

Technical Specifications	MC 4EN
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W
Transformer impedance	1,67 k $\Omega$ - 3,33 k $\Omega$ - 6,66 k $\Omega$
Sensitivity	77 dB (1 W / 4 m)
Maximum SPL	84 dB (Pmax / 4 m)
Frequency response	110 Hz - 15 kHz
Dispersion at 500 Hz	180° conical
Dispersion at 1000 Hz	180° conical
Dispersion at 2000 Hz	150° conical
Dispersion at 4000 Hz	100° conical
Driver dimensions	4" (100 mm)
Operating temperature	-10° C - +35° C
Dimensions	ø 181 mm x 67,5 mm
Weight	0,76 kg
Material	Steel
Colour	White (RAL 9016), Black (RAL 9017)

