

# RF 10

## RIGID AND FLEXIBLE PROFESSIONAL LOUDSPEAKERS

The RF series installation loudspeakers are engineered for high power output and excellent sound clarity. Designed for versatile mounting options—including wall, ceiling, hanging, and pole mounting—these speakers feature a rigid birch plywood cabinet with integrated hanging points. Optional horizontal and vertical mounting brackets, as well as a universal bracket, enhance installation flexibility. The RF 10 model includes a two-way driver system and dual connectors speakON and Phoenix for seamless integration into professional audio systems.




Technical Specifications	RF 10
Type	Full range two-way loudspeaker
Impedance	8 $\Omega$
Rated power	250 W RMS, 500 W peak
Sensitivity	99 dB (1 W / 1 m)
Maximum SPL	128 dB
Frequency response	60 Hz - 19 kHz (-5 dB)
Driver dimensions	10" (254 mm) woofer, 1.35" (34 mm) tweeter
Crossover point	2 kHz
Dispersion	75° (H) x 55° (V)
Dimensions (L x W x H)	320 mm x 280 mm x 530 mm
Weight	18 kg
Mounting options	Pole mounting, rigging points, optional mounting brackets: RF H10B (horizontal), RF V10B (vertical), RF UB universal angle
Grill material	Cabinet – birch plywood with texture coating, grill – powder coated steel
Colour	Black (RAL 9017)


# RF 10

## RIGID AND FLEXIBLE PROFESSIONAL LOUDSPEAKERS

Frequency response

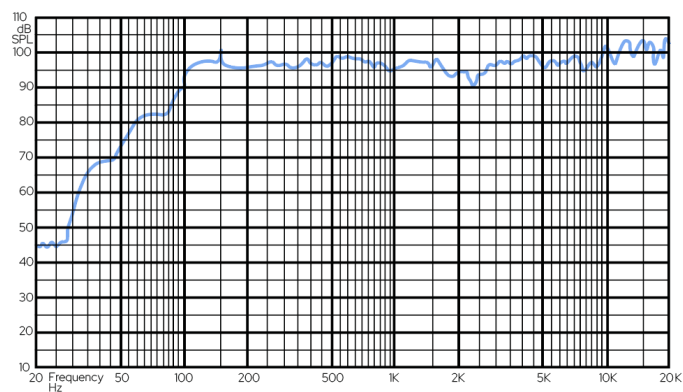

Impedance

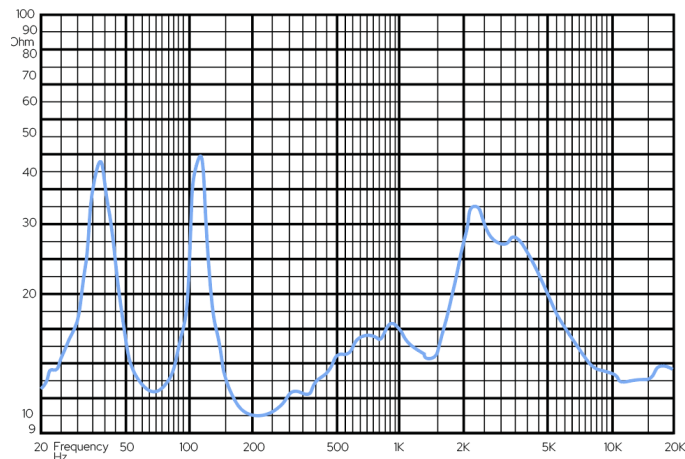

Dimensions

