

RF 55

PROFESSIONAL COLUMN LOUDSPEAKER

RF 55 is a 250 W high-performance column loudspeaker engineered for superior sound clarity in fixed installations. It features a driver configuration of 2×5" woofers and 2×0.75" tweeters, ensuring accurate reproduction of both music and speech. With a 120° horizontal and 20° vertical dispersion, it offers controlled directivity ideal for acoustically sensitive environments. The cabinet is made of durable, texture coated birch plywood and supports single or array mounting using the RF B55 flying frame kit. Input and link options include both Phoenix and speakON connectors for installation flexibility.



Technical Specifications	RF 55
Type	Column loudspeaker
Impedance	8 Ω
Rated Power	250 W RMS, 500 W peak
Sensitivity	94 dB, 1 W @ 1 m
Max SPL	122 dB
Frequency response	92 Hz - 20 kHz
Drivers	2 x 5" (127 mm) woofers, 2 x 0.75" (19 mm) tweeters
Dispersion	120° (H) x 20° (V)
Connectors	SpeakON and Phoenix connectors for input and link
Dimensions	165 mm x 216 mm x 541 mm
Weight	9.6 kg
Material	Cabinet: birch plywood with texture coating Grill: powder-coated steel
Mounting options	U-bracket (included), RF UB55 universal angle mounting bracket (optional) RF B55 omnimount bracket & flying frame (optional)
Color	Black (RAL 9017)



Optional RF UB55
universal mounting
bracket




Optional RF B55
omnimount bracket &
flying frame

RF 55

PROFESSIONAL COLUMN LOUDSPEAKER

Frequency response

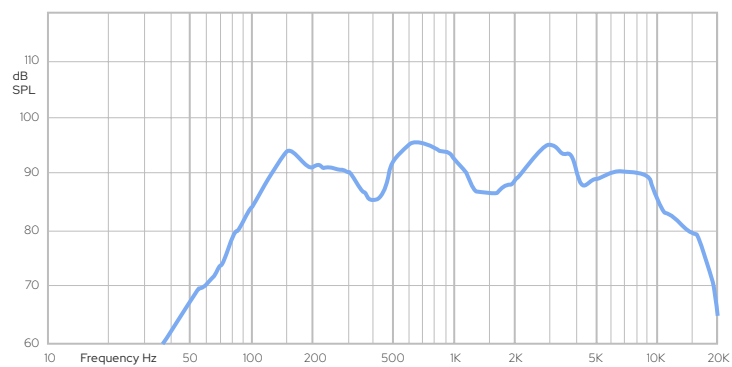

Dimensions

