

RFS 12

RIGID AND FLEXIBLE PROFESSIONAL SUBWOOFER

The RFS 12 subwoofer is part of the RF Series and is engineered for high-power audio reinforcement. It features a 12-inch low-frequency driver housed in a rigid birch plywood cabinet, optimized for structural integrity and acoustic performance. The enclosure supports both floor-standing and suspended installations, utilizing integrated M10 hanging points. When combined with RF Series full-range loudspeakers, the RFS 12 extends low-frequency response and increases overall SPL.




Technical Specifications	RFS 12
Type	Subwoofer
Impedance	8 Ω
Rated power	350 W RMS, 700 W peak
Sensitivity	96 dB 1W/1M
Maximum SPL	128 dB
Frequency response	33 - 160 Hz (-5 dB)* * active crossover must be applied
Driver dimensions	12" (305 mm) woofer
Dimensions (L x W x H)	410 mm x 460 mm x 515 mm
Weight	31.6 kg
Mounting options	Speaker pole attachment, rigging points
Grill material	Cabinet – birch plywood with texture coating, grill – powder coated steel
Colour	Black (RAL 9017)

RFS 12


RIGID AND FLEXIBLE PROFESSIONAL SUBWOOFER



Frequency response

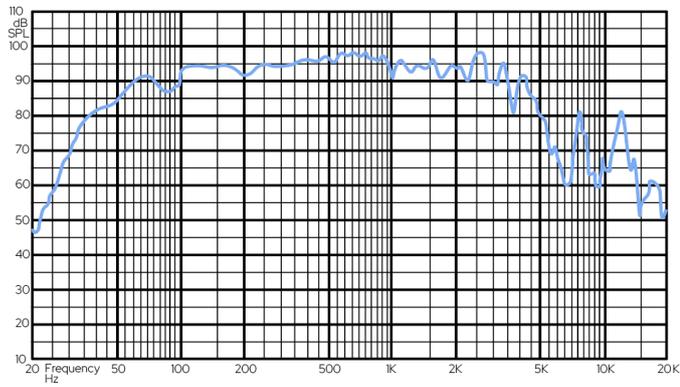

Impedance

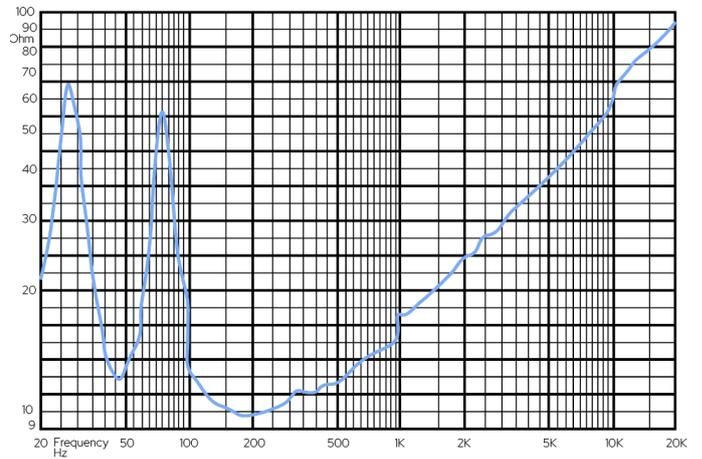

Dimensions

