


COMPACT ACTIVE SUBWOOFER WITH 100 V AND LINE LEVEL INPUTS

The CSUB is a compact active subwoofer designed for mounting on flat surfaces. It features a 10" driver, a 200 W Class-D amplifier, DSP-based EQ correction, and a built-in audio limiter. The subwoofer can receive audio signals from 100 V lines and includes a dedicated DSP setting to restore low frequencies typically lost in constant voltage systems. The amplifier includes a switchable automatic standby function for energy efficiency. Constructed from laminated MDF, the CSUB is available in black or white finishes. Wall mounting brackets are included.

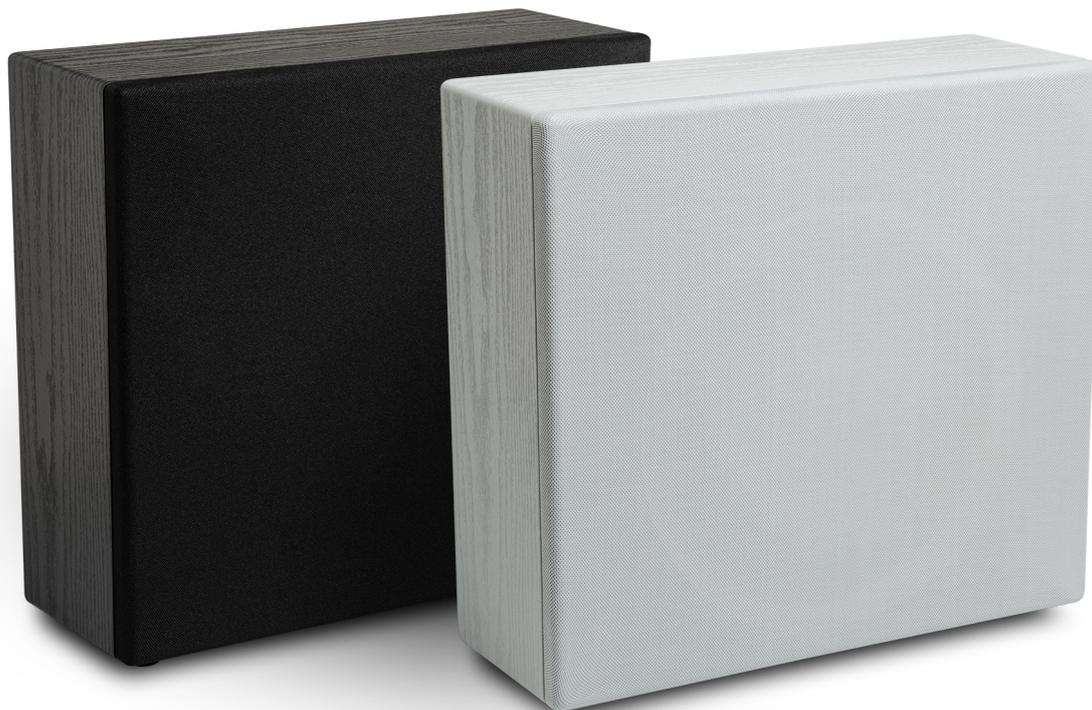


Technical Specifications	CSUB
Rated output power	200 W
Max power consumption	300 W
Stand by power consumption	3 W
Power supply	~ 220-230 V, 50 Hz
Driver dimensions	10" (254 mm)
Sensitivity	84 dB (1W / 1m)
Max. SPL	107 dB
Frequency Response	35 Hz - 150 Hz
Crossover point	40 Hz - 120 Hz
Inputs	1 x Stereo RCA, 1 x Mono hi-level input
RCA input sensitivity	-14dBu
RCA input impedance	10 k Ω
Cooling	Passive cooling
Material	Laminated MDF
Colour	Black (RAL 9017), White (RAL 9016)
Dimensions (H x W x D)	405 mm x 384 mm x 143 mm
Weight	10.6 kg

CSUB



COMPACT ACTIVE SUBWOOFER WITH 100 V AND LINE LEVEL INPUTS

Frequency response

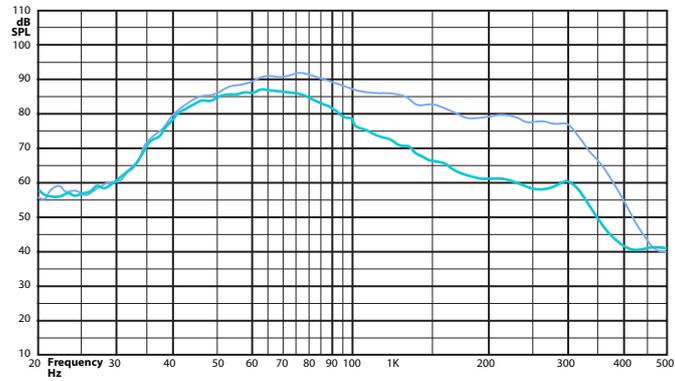

- 100 V input, 120 Hz crossover
- 100 V input, 40 Hz crossover

Dimensions



405 mm



384 mm



143 mm